


Pneumatic Nailer

WM 12-156

A multipurpose tool for BeA corrugated fasteners type WM. The perfect solution for fastening butt joints or corner joints. Used in conjunction with an attachment this tool can perform invisible fastening of inner-corner joints.

Popular Applications:

Butt and corner jointing in furniture, windows, and doors.

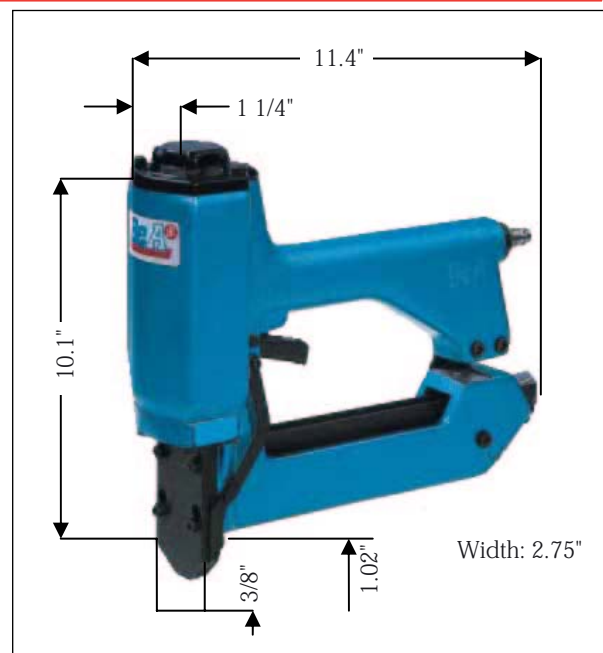

Technical Data

Model:	WM 12-156
	Standard
Part number:	12000126
Loading type:	top loading
Fastener type:	WM
Magazine capacity:	74
Standard load, strips x fasteners/strip:	3 x 24
Working pressure:	90-120 P.S.I.
Maximum air pressure:	120 P.S.I.
Air consumption:	.053 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"
Weight:	6.17 lbs.

Items supplied with tool: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories

Part number	Description
14401607	Balance reel hanger
14403402	Remote firing valve
14403442	Stationary mounting fixture

All BeA pneumatic tools can be jig mounted. We supply the necessary accessories.



This tool conforms to the EC Directive for Machinery (89/392 EWG)


Pneumatic Nailer

WM 12-156



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Corrugated fasteners type WM



Part number	Description	L = Length in.
10800000	WM 06 BK	1/4"
10800002	WM 09 BK	3/8"
10800004	WM 12 BK	1/2"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point