


Pneumatic Stapler

90/25-552

The BeA 90/25-552 stapler drives 18 gauge narrow crown staples from 3/8" to 1" in length. The bottom loading magazine, with easy open latch, affords quick re-loading. Soft handle grip provides comfort and better control. Rear exhaust keeps oil and dust away from the work surface. Available with a top loading long magazine and with a sequential work contact.

Popular Applications

Cabinetry, trim & moldings, shutter louvers, underlayment, lattice panels, picture frames.

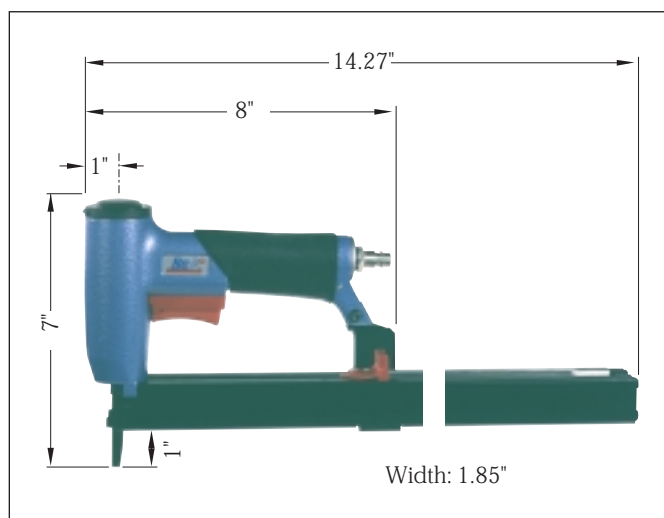

Technical Data

Model:	90/25-552 Standard	90/25-552L Long magazine
Part number:	12000158	12000341
Magazine type:	bottom loading	top loading
Staple type:	90	90
Magazine capacity:	111	248
Standard load, strips x staples/strip:	1 x 100	2 x 100
Operating pressure:	75-90 P.S.I.	75-90 P.S.I.
Maximum air pressure:	90 P.S.I.	90 P.S.I.
Air consumption:	.016 cu. ft./cycle @ 90 P.S.I.	.016 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"	ø 3/8"
Weight:	2.65 lbs.	3.09 lbs.

Items supplied with tool: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories

Part number	Description
14405569	Remote firing valve

All BeA pneumatic tools can be jig mounted.
We supply the necessary accessories.



This tool conforms to EC Directive
for Machinery (89/392 EWG)


Pneumatic Stapler

90/25-552



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Staple type 90



Description	L = Length inches
90/12 NK HZ	1/2"
90/15 NK HZ	5/8"
90/18 NK HZ	3/4"
90/21 NK HZ	7/8"
90/25 NK HZ	1"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point