


Pneumatic Stapler

90/32-611

A lightweight and particularly well balanced tool. The compact design of the 90/32-611 stapler makes it an ideal tool for high speed applications and for getting into hard to reach staple placements. This air efficient stapler drives 18 gauge narrow crown staples from 5/8" to 1 1/4" in length. This tool is also available with a double length magazine which reduces time spent loading.

Popular Applications

Cabinetry, interior trim, lattice panels, finished gypsum board to interior wall panels-manufactured housing.

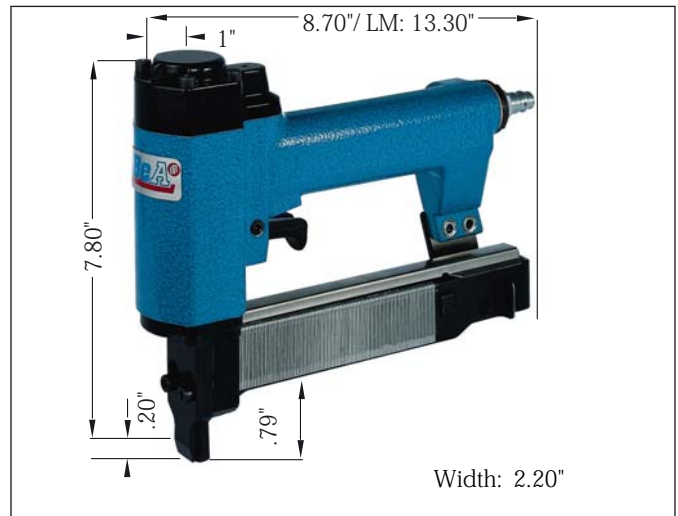

Technical Data

Model:	90/32-611 Standard	90/32-611LM Long Magazine
Part number:	12000199	12000203
Loading type:	top loading	top loading
Staple type:	90	90
Magazine capacity:	125	215
Staple sticks:	1 x 100	2 x 100
Air pressure range:	90-120 P.S.I.	90-120 P.S.I.
Maximum air pressure:	120 P.S.I.	120 P.S.I.
Air consumption:	.032 cu. ft./cycle @ 90 P.S.I.	.032 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"	ø 3/8"
Weight:	2.89 lbs	3.7 lbs.
Items supplied with tool:	Operating instructions, spare parts list, service instructions.	

Subject to technical modifications.

Accessories:

Part number	Description
14400904	Height adjustable work contact shoe
14403421	Remote firing valve assembly
14403527	Stationary mounting fixture

All BeA pneumatic tools can be jig-mounted. We supply the necessary accessories.



This tool conforms to the EC Directive for Machinery (89/392 EWG)


Pneumatic stapler

90/32-611



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Staple type 90



Description	L = Length inches
90/15 NK HZ	5/8"
90/18 NK HZ	3/4"
90/21 NK HZ	7/8"
90/25 NK HZ	1"
90/28 NK HZ	1 1/8"
90/32 NK HZ	1 1/4"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point