


Pneumatic Stapler 92/40-712

A short compact tool for driving 18 gauge narrow crown staples from 5/8" up to 1 1/2" in length. This tool has the power to drive longer length 18 gauge staples in problematic, harder to penetrate materials. The narrow nose of the 90/40-712 tool affords better operator visibility for more precise fastener placement.

Popular Applications

Cabinetry, interior trim/finish work, millwork, casegoods, underlayment.

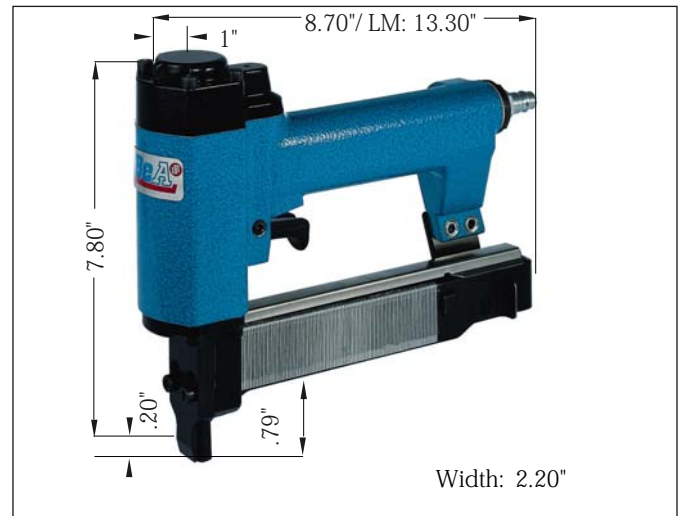

Technical Data

Model:	90/40-712
Part number:	12000236
Magazine type:	top loading
Work contact:	bump trip
Fastener type:	92
Magazine capacity:	125
Standard load, strips x staples/strip:	1 x 100
Operating pressure:	75-120 P.S.I.
Maximum operating pressure:	120 P.S.I.
Air consumption/cycle:	.035 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	Ø 3/8"

Weight:	4.19 lbs.
---------	-----------

Items supplied with tool:	Operating instructions, spare parts list, service instructions, silencer.
---------------------------	---

Subject to technical modification.

Accessories

Part number	Description
14403421	Remote firing valve assembly
14403536	Stationary mounting fixture

All BeA pneumatic tools can be jig-mounted.
We supply the necessary accessories.



This tool conforms to the EC Directive
for Machinery (89/392 EWG)


Pneumatic Stapler

92/40-712



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Staple type 92



Description	L = Length inches
92/15 NK HZ	5/8"
92/18 NK HZ	3/4"
92/21 NK HZ	7/8"
92/25 NK HZ	1"
92/28 NK HZ	1 1/8"
92/32 NK HZ	1 1/4"
92/38 NK HZ	1 1/2"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point