


Pneumatic Stapler

Variant 806

This versatile tool is capable of driving BeA type 17 (17 ga.) and type 16 (16 ga.) staples from 1" to 2 1/2" in length as well as .080" and .086" diameter T-nails from 1" to 2 1/4" in length. The top loading magazine can hold up to 150 staples and the Variant 806 tool has the power for the really tough jobs.

Popular Applications

Expendable pallets, sheathing, roof decking, furniture frames, subflooring, door and window units, soffits, fascia.

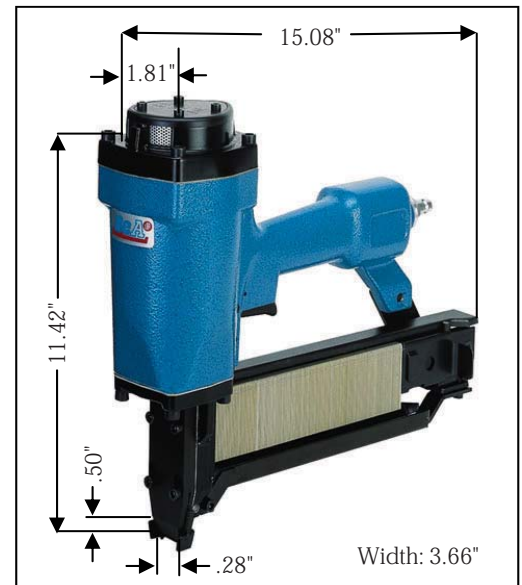

Technical Data

Model:	Variant 806
	Standard
Part number:	12000271
Magazine type:	top loading
Type of work contact:	bump trip
Fastener type:	Type 14, Type 16 and .080" & .086" T-nails
Magazine capacity:	156 type 14 staples, 144 type 16 staples and 103 T-nails
Standard load, strips x staples/strip:	2 x 75 type 14, 2 x 70 type 16 and 3 x 33 T-nails
Operating pressure:	75-120 P.S.I.
Maximum air pressure:	120 P.S.I.
Air consumption:	.077 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"

Weight:	6.83 lbs.
---------	-----------

Items supplied with tool:	Operating instructions, spare parts list, service instructions.
---------------------------	---

Subject to technical modification.

Accessories



Part number	Description
14404669	Balance reel hanger
14403415	Remote firing valve assembly
14403514	Stationary mounting fixture

All BeA pneumatic tools can be jig mounted.
We supply the necessary accessories.




This tool conforms to the EC Directive
for Machinery (89/392 EWG)

Pneumatic Stapler Variant 806




BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Staple types 14 and 16

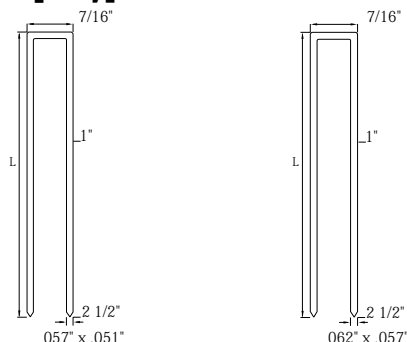

T-nails



Fastener drawings are not full scale.

Description	L = Length inches
16/25 NK HZ	1"
16/32 NK HZ	1 1/4"
16/38 NK HZ	1 1/2"
16/45 NK HZ	1 3/4"
16/50 NK HZ	2"
16/55 NK HZ	2 1/4"
16/65 NK HZ	2 1/2"
16/25 BK HZ	1"
16/32 BK HZ	1 1/4"
16/38 BK HZ	1 1/2"
16/45 BK HZ	1 3/4"
16/50 BK HZ	2"
16/55 BK HZ	2 1/4"
16/65 BK HZ	2 1/2"
14/25 NK	1"
.080" and .086" T-nails	1" to 2 1/4"

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point