


# Pneumatic Tacker

## 72/16-422

This light but powerful tacker of the BeA 420 series takes staples type 72 in lengths from 5/32" to 5/8". The low air consumption, long service life and ease of maintenance of this tacker make it a real cost saver. The bottom-loading magazine allows for easy and quick loading. Further features are the ergonomic design and the integrated silencer.

### Popular Applications

Upholstery, case goods, cabinetry, automotive industry, window screens, displays, shipping tags.

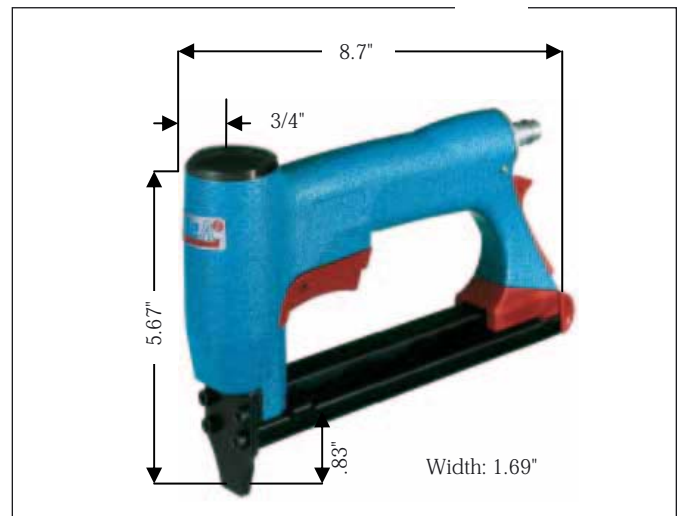

### Technical Data

Model:	<b>72/16-422</b> Standard	<b>72/16-422</b> contact trip
Part number:	12000069	12000070
Loading type:	bottom loading	bottom loading
Fastener type:	72	72
Magazine capacity:	190	190
Standard load, strips x fasteners/strip:	1 x 182	1 x 182
Working pressure:	75-90 P.S.I.	75-90 P.S.I.
Maximum air pressure:	90 P.S.I.	90 P.S.I.
Air consumption:	.01 cu. ft./cycle @ 90 P.S.I.	.01 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"	ø 3/8"
Weight:	2.07 lbs.	2.14 lbs.

Items supplied with tool: Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

### Accessories

Part number	Description
14400827	Roller edge guide
14400834	Special back nose assembly for 1/4" staples and shorter only
14400679	Back nose assembly for 1/8" staples only
14403330	Remote firing valve assembly

All BeA pneumatic tools can be jig mounted.  
We supply the necessary accessories.



This tool conforms to the EC Directive  
for Machinery (89/392 EWG)


# Pneumatic Tacker

## 72/16-422



BeA Fasteners U.S.A.  
2100-120 Fairfax Road  
Greensboro, NC 27407  
Phone: (336) 510-4232  
Fax: (336) 510-4233

### Fastener type 72



Description	L = Length in.
72/04 NK H	5/32"
72/05 NK H	3/16"
72/06 NK H	1/4"
72/08 NK H	5/16"
72/10 NK H	3/8"
72/12 NK H	1/2"
72/14 NK H	9/16"

Other lengths and finishes are also available on request.

### Fastener nomenclature:

NK = Galvanized steel  
NKS = Galvanized steel, high carbon  
BK = Brite steel  
BKS = Brite steel, high carbon

HZ = Resin coated  
NR = Stainless steel  
DP = Divergent point