


# Pneumatic Stapler 92/40-722

The BeA 92/40-722 is a compact but powerful tool, that drives fasteners type 92 in lengths from 3/4" to 1 1/2". The top loading magazine assures easy and quick reloading. The tool is so powerful that staples will countersink even into hardwood.

## Popular Applications

Case assembly, door and window mfg., siding, case backs, trim work

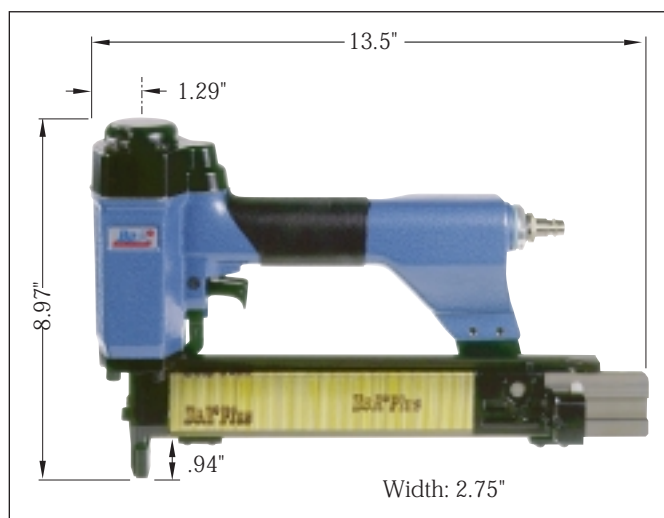

## Technical Data

Model:	<b>92/40-722</b>
Part number:	12000343
Loading type:	top loading
Fastener type:	92
Magazine capacity:	211
Standard load, strips x fasteners/strip:	2 x 100
Working pressure:	75-90 P.S.I.
Maximum air pressure:	90 P.S.I.
Air consumption:	.035 cu. ft./cycle @ 90 P.S.I.
Recommended hose I.D.:	ø 3/8"

Weight:	4.62 lbs.
---------	-----------

Items supplied with tool:	Operating instructions, spare parts list, service instructions, silencer.
---------------------------	---------------------------------------------------------------------------

Subject to technical modifications.

## Accessories

Part number	Description
14400992	Edge guide
14400921	Height adjustable slide block
14403421	Remote firing valve
14403536	Stationary mounting fixture

All BeA pneumatic tools can be jig mounted.  
We supply the necessary accessories.



This tool conforms to the EC Directive  
for Machinery (89/392 EWG)


# Pneumatic Stapler

## 92/40-722



BeA Fasteners U.S.A.  
2100-120 Fairfax Road  
Greensboro, NC 27407  
Phone: (336) 510-4232  
Fax: (336) 510-4233

### Fastner type 92

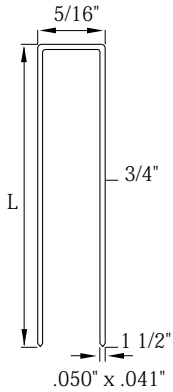

Description	L = Length in.
92/18 NK HZ	3/4"
92/21 NK HZ	7/8"
92/25 NK HZ	1"
92/28 NK HZ	1 1/8"
92/32 NK HZ	1 1/4"
92/38 NK HZ	1 1/2"

Other lengths and finishes are also available on request.

#### Fastener nomenclature:

NK = Galvanized steel  
NKS = Galvanized steel, high carbon  
BK = Brite steel  
BKS = Brite steel, high carbon

HZ = Resin coated  
NR = Stainless steel  
DP = Divergent point