

For R20 strip nails



# BeA Pneumatic Nailer R130-959E


## For nails:

R20 strip nails 3.8 – 4.2 mm in the lengths of 90 – 130 mm

- Extremely powerful and sturdy
- Depth control adjustment
- Integrated sound absorption
- Ergonomic handgrip, operator friendly
- Single sequential actuation
- Second handgrip
- Dry fire control
- Thread for mounting

## Applications

Roofing, framing, truss building, pallets, wooden packaging, house construction etc.

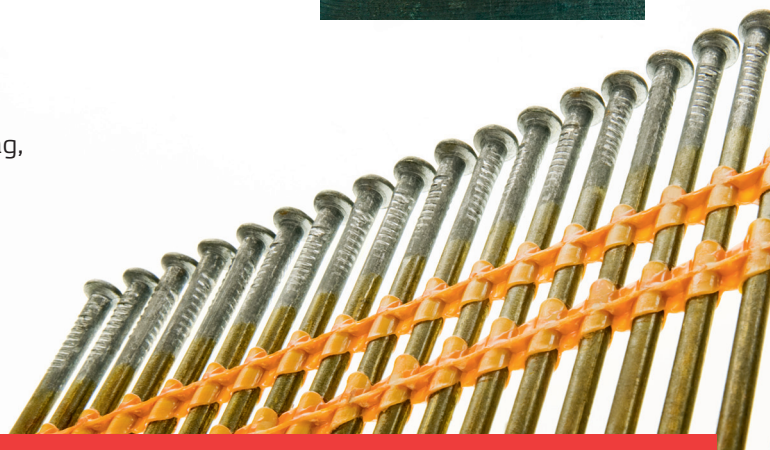

# BeA R130-959E

## Technical Data



Article code	12100472
EAN code	4045759048572
Magazine type	20° top loader
Weight	6.2 kg
Dimensions in mm	L 553, H 478, B 144
Safety system	Single actuation
Fastener type	Strip nails type R20
Magazine capacity	2 strips
Operating pressure	5 – 8 bar
Max operating pressure	8 bar
Air consumption/operation	7.0 litre / 6 bar
Inner hose diameter	9 – 10 mm recommended
Emission sound pressure level at the workstation	$L_{pA, 1s, d} = 96.4 \text{ dB}$
Single shot emission sound pressure level	$L_{WA, 1s, d} = 100.5 \text{ dB}$
Vibration level as per ISO 8662-11 is 4.0 m/s <sup>2</sup> .	
Accessories	Operating instructions, spare parts list, service instructions, allen wrench, oil, safety glasses

## Strip nails R20



R20 : 90 – 130 mm

<b>Strip nails</b>	= Plastic collated type R20
Width	3.8 – 4.2 mm
Length	90 – 130 mm
Material	BK = steel, bright NK = steel, electro galvanized RF = stainless steel, comparable to material 1.4301 NR = stainless steel, comparable to material 1.4401 FV = steel, hot dipped galvanized
Surface properties	Smooth Ring shank Screw shank

Further types on request, nails conforming to DIN1052 and to EN 14592 (Eurocode 5)

**Joh. Friedrich Behrens AG**  
Industrielle Befestigungssysteme  
Bogenstraße 43 – 45  
22926 Ahrensburg  
Germany

**Further Information:**  
Phone: +49 (0) 41 02 78 - 283  
Fax +49 (0) 41 02 78 - 275  
eMail: [info@bea-group.com](mailto:info@bea-group.com)  
[www.Bea-Group.com](http://www.Bea-Group.com)

BeA is a member of the following trade associations:

