


Pneumatic Stapler

380/25-559 L

The light and well-balanced BeA Pneumatic Stapler 380/25-559 L drives fasteners type 380/80 in lengths from 3/8" to 1". Due to the top loading magazine with large capacity is the nailer very well suited for stationary mounting. The main benefit of the BeA Pneumatic Stapler is its efficiency: high power at minimal air consumption.

Popular Applications:

Upholstery, weather stripping, cabinetry, insulation, picture frames, boat seating, wicker work.

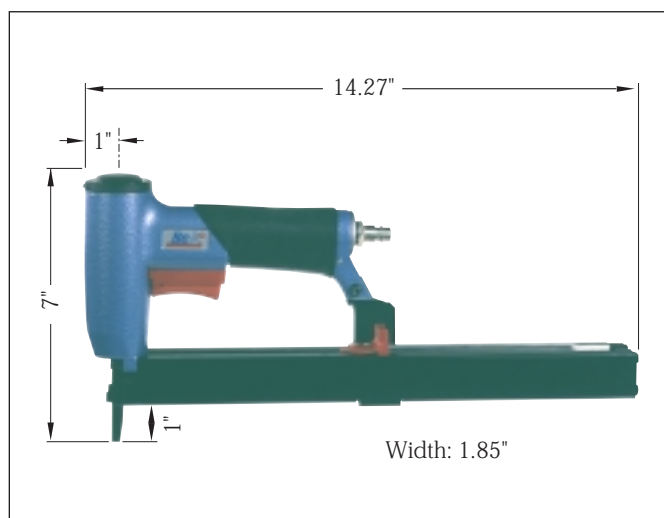

Technical Data

| | |
|--|--|
| Model: | 380/25-559 L Long magazine |
| Part number: | 12000352 |
| Loading type: | top loading |
| Fastener type: | 380/80 |
| Magazine capacity: | 322 |
| Standard load, strips x fasteners/strip: | 2 x 125 (Type 80, 3/8" - 9/16"), 3 x 100 (Type 80, 5/8" - 1"), 2 x 150 (Type 380) |
| Working pressure: | 75-120 P.S.I. |
| Maximum air pressure: | 120 P.S.I. |
| Air consumption: | .0015 cu. ft./cycle @ 90 P.S.I. |
| Recommended hose I.D.: | ø 3/8" |

| | |
|---------|-----------|
| Weight: | 3.09 lbs. |
|---------|-----------|

| | |
|---------------------------|---|
| Items supplied with tool: | Operating instructions, spare parts list, service instructions, silencer. |
|---------------------------|---|

Subject to technical modifications.


Pneumatic Stapler

380/25-559 L



BeA Fasteners U.S.A.
2100-120 Fairfax Road
Greensboro, NC 27407
Phone: (336) 510-4232
Fax: (336) 510-4233

Fastener Type 380/80



| Description | L = Length in. |
|--------------|-------------------|
| 380/10 NK | 3/8" |
| 380/12 NK | 1/2" |
| 380/14 NK | 9/16" |
| 380/16 NK HZ | 5/8" |
| 80/20 NK | 3/4" |
| 80/25 NK | 1" |

Other lengths and finishes are also available on request.

Fastener nomenclature:

NK = Galvanized steel
NKS = Galvanized steel, high carbon
BK = Brite steel
BKS = Brite steel, high carbon

HZ = Resin coated
NR = Stainless steel
DP = Divergent point