


# Carton Closing Stapler AT-C18 and AT-C22

This durable tool is designed to staple corrugated cardboard for closing boxes. The AT-C series air closers have separate adjustments for staple leg length, depth of penetration and tightness of clinch. These adjustments afford the ability to perform both through and blind clinching of box flaps. Cycle through trigger valving maximizes speed of operation. Versions of this tool are available for clinching 5/8" and 3/4" leg length staples or 3/4" and 7/8" leg length staples (crown width of 1 1/4") by making one simple adjustment.

## Popular Applications

Closing of corrugated boxes

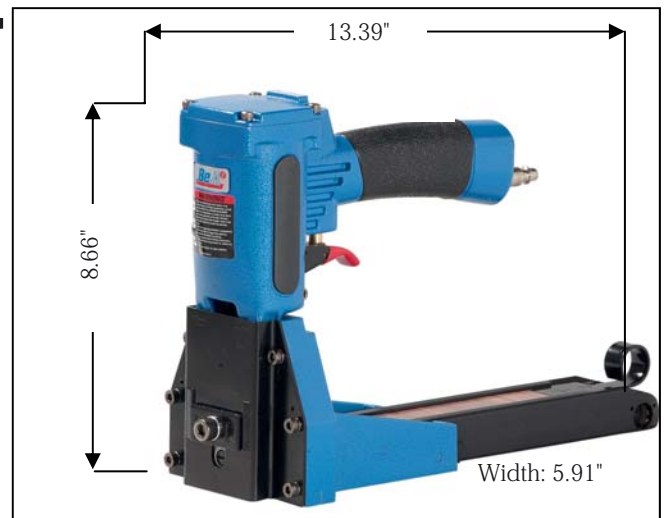

## Technical Data

Model:	<b>AT-C18</b> Standard	<b>AT-C22</b> Standard
Part number:	12100285	
Loading type:	rear loading	rear loading
Fastener type:	1 1/4" x 5/8" and 3/4"	1 1/4" x 3/4" and 7/8"
Magazine capacity:	100	100
Standard load, strips x fasteners/strip:	???	???
Working pressure:	70-90 P.S.I.	70-90 P.S.I.
Maximum air pressure:	100 P.S.I.	100 P.S.I.
Air consumption:	0.04 cu.ft./cycle @ 80 P.S.I.	0.04 cu.ft./cycle @ 80 P.S.I.
Recommended hose I.D.:	3/8"Ø	3/8"Ø
Weight:	5.84 lbs.	5.84 lbs.

Items supplied with tool: Operating instructions, spare parts list, service instructions.


Subject to technical modifications.

# Carton Closing St. AT-C18 and AT-C22




BeA Fasteners U.S.A.  
2100-120 Fairfax Road  
Greensboro, NC 27407  
Phone: (336) 510-4232  
Fax: (336) 510-4233

## Fastener type C-Series

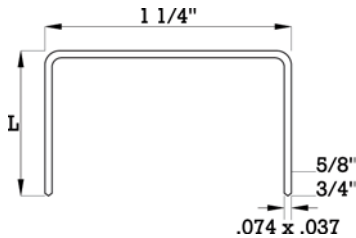

Part number	Description	L = Length in.
10000775	32/15 (C5/8)	5/8"
10000776	32/18 (C3/4)	3/4"

Other lengths and finishes are also available on request.

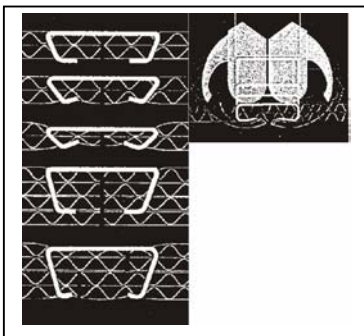

The depth and tightness of clinch,  
can be adjusted in five separate  
settings.